


Lightweight Compact Foldable 75-watt / 19-volt Solar Panel

Back-packable Power for Individuals and Teams


Power and Charge Radios, Sensors, End-user Devices, Batteries

Use with MilSpec or Commercial PV Controllers / Power Managers

Quick & Easy Employment

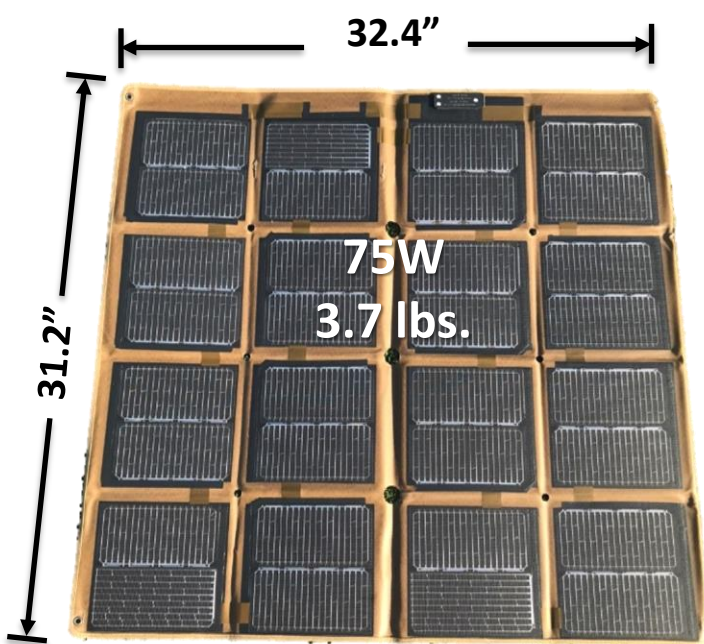

- **Powerful: 75 Watts** in a small footprint
 - Best-in-class shade tolerance!
 - Gang panels for more power
 - Performs in low angle and diffuse light
- **Simple:** Integrated SAE connector eliminates redundant cable and snag hassle
- **Light & Compact:** Fit in assault pack or ruck

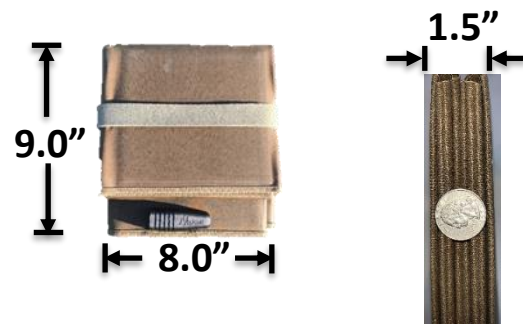

Built Rugged for Military and Off-grid Use in Harsh Conditions

- **Durable:** Glass-free; Revolutionary electrical interconnect for lifetime performance/reliability
- **Weatherproof:** Protected against dust/water immersion (up to 1 m)
- **Low maintenance:** Non-stick surface resists soiling/wipes clean
- **Low visual signature:** Non-reflective surface maximizes light capture and reduces visibility; Complete camouflage surface appearance is optional

Nishati Endurance™ 75F

Nishati Endurance™ 75F Specifications

General Description

Part Number	231286
PV Cells	Mono-crystalline Silicon (mc-Si) PERC
Cell Quantity	32 half-cells
Electrical Interconnect	Merlin™ Interconnect
Power Output Connections	(1) Integrated SAE 2-pin port (shrouded)
Limited Warranty	2 years


Module Power Output (+/- 3% at 25°C, AM1.5, and 1000W/m²)

Rated Power (Pmax)	75 Watts
Vmp	17.5V
Imp	4.3A
Voc	21.0V
Isc	4.6A

Module Dimensions

Folded Configuration (LxWxD)	9.0"L x 8.0"W x 1.5"D
Deployed Configuration (LxWxD)	31.2"L x 32.4"W x 0.75"D (panel + JBox) / 0.12" (panel)
Weight	3.7 lbs.
Environmental	IP67 (Dust proof; waterproof to 1m immersion)

Point-of-Use Radio Power and Battery Charging

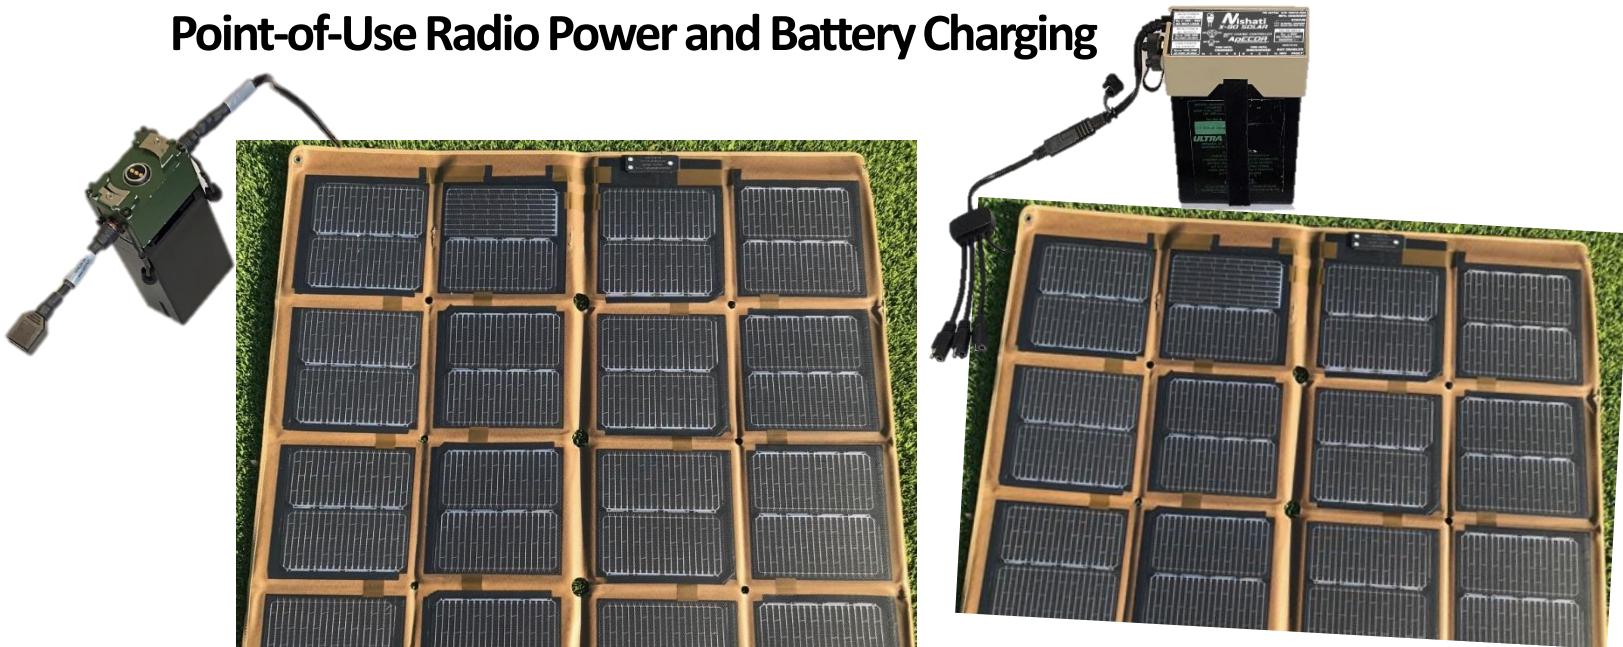

2200 E. Williams Field Rd. Ste 200
 Gilbert, AZ 85295
 571-999-3482



Website: www.nishati-us.com

Patents: www.nishati-us.com/patent

E-mail inquiries: Info@nishati-us.com