



Outpost™ Hybrid Generator (OHG) 2000-AC

Modular 2kW 120V Hybrid-Ready Diesel Generator




**Two Generators Easily
Synchronize in Parallel
for Increased Power**

**Portable, Reliable, Rugged Power Source
Built to Military Standards**

High Quality Spot Power Generation

**Export Power from Vehicles or
Use at Fixed Sites**

**Power Communications, Surveillance, Sensors,
Mobile Air Defense**

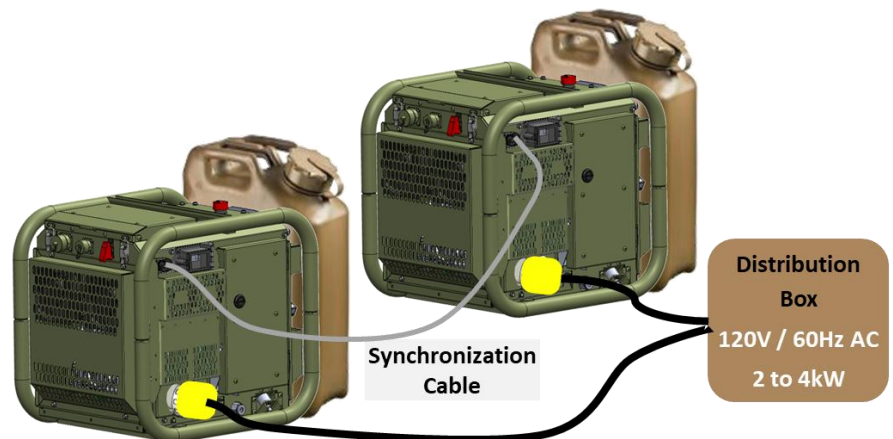

- **Digital Human-Machine Interface (HMI) & Display** | Controls, Electrical Data, Fault Monitoring
- **Easy, Reliable Start** | Electric or Manual
- **Hybrid Operation** | Externally-Commanded Start / Stop
- **Modular** | Military jerry can serves as a modular/hot-swappable fuel tank
- **Scalable** | Parallel two generator sets for more power
- **Clean Power** | Supports sensitive electrical loads
- **Compact / Lightweight** | Un-matched capability-to-weight
No MHE required to lift or move; 1-2 person moveable (3-4-person carry)
Enables efficient power configurations on & off vehicles
- **Resilient** | Start & operate in all conditions, extreme temperatures
- **Quiet** | 75 - 80dB at 7 meters

Outpost™ Hybrid Generator (OHG) 2000-AC Kit Specifications

Kit Part Number NSN	251650-003-2i (Paralleling) / 251650-003-2G (GFCI / Non-paralleling)
Components	(1) Outpost Hybrid Generator 2000-AC (PN 89003-2i / 89003-2G) (1) OHG Quick Release Exhaust Extension (PN 89001) (1) OHG Quick Release Plastic Fuel Can Interface (PN 91020) (1) OHG Ancillary Equipment Stowage Bag, Berry Amendment Compliant (PN 94004) (1) 20L Plastic Jerry Fuel Can, OD Green (PN 91022)
Optional Accessories	20L Plastic Jerry Fuel Can, Sand (PN 91021) Weather Cover (PN 94005) Transport Case (PN 91017) External Silencer (PN 99004) with Exhaust Extension (PN 99005) AC Synchronization Cable (99002)
Warranty	1-year limited warranty against defective material & workmanship; Extended plans available
Engine	Single Cylinder Air-cooled
Power Output	2kVA 120V/60Hz (PN 89003)
Starting Power	24V 6.3Ah/130 CCA AGM internal battery Auxiliary 24V battery interface for cold temperature operations and hybrid remote start augmentation
Power Interface	20A / 120V IEC 60309 Type 2 Pole / 3 Wire Non-parallelable GFCI Option Available Aux. Battery IN / DC OUT: M8 Post Terminals Starter Battery Trickle Charge Receptacle: SAE 2-pin
Power Quality	Pure Sine Wave / Supports sensitive electronics
Power Protection	20A manual reset circuit breaker (GFCI Option) Overload, Over-Temp, Short-circuit Emergency Stop (E-STOP) Aux. Battery Isolate Switch / 60A CB (resettable) Starter Battery Isolate Switch / 60A CB (resettable)
Parallel Capability	Two units 4kW / 120VAC
Fuel	JP5-JP8 Jet A/A1 F34, F35, F44, F54, F63, F64, F65 DL-1, DL-2 Kerosene US No. 1 & 2 EN 590
Fuel Consumption	0.27 gallons per hour (at rated load)
Oil Capacity Type	0.8L API Service Categories CD or higher / SAE viscosity according to ambient temperatures
Acoustic Profile	75 - 80 dB @7m [optional external muffler for reduced signature]
Dimensions	19.69" L x 15.75" W x 17.72" H
Weight	132.3 lbs. (Dry) 136.7 lbs. (Wet)
Operating Temperatures	- 20°F to +125°F at sea level [Cold Start Mode, Auxiliary Battery, 5W30 oil recommended below 32°F]
Environmental Testing	MIL-STD-705D and MIL-STD-810H pending
EMC	MIL-STD-461G pending
Vehicle Mountable	Use as an auxiliary power unit (APU)
Human Interface	Rugged digital interface with 4.3" LED screen & command buttons
Remote Communications Interface	<ul style="list-style-type: none"> • 5V TTL & CANBus for Remote Start/Stop, battery communications, remote HMI/controls • RJ45 port for system software updates
Starting & Operating Modes	<ul style="list-style-type: none"> • Normal (User-Initiated Electric Start) • Cold Start (User-initiated Normal mode <32°F) • Remote Start (External 5V TTL or CANBus) • Manual (User-Initiated Recoil Start)

2200 E. Williams Field Rd. Ste 200
Gilbert, AZ 85295
571-999-3482

**Portable • Reliable • Rugged
Military Power**

Website: www.nishati-us.com

Patents: www.nishati-us.com/patent

E-mail inquiries: Info@nishati-us.com